04 · KPF SERIES — LOW-PROFILE PEDESTALS

KPF-13

Compact single-piece fixed-height pedestal for low tile installations



KPF-13 is a compact one-piece pedestal with an integrated joint spacer for low-height tile installations. Thin KA-F13 extenders of 1 mm and 3 mm fine-tune the height on uneven substrates.

13 mm Fixed height	**Ø145.5** mm Diameter
+1 / +3 mm KA-F13 extenders	**2 · 3 · 4 · 5** mm Joint options

MODEL RANGE

	ITEM CODE	DESCRIPTION	OPTIONS
	**KPF-13**	Compact single-piece fixed-height pedestal with joint spacer	S2 · S3 · S4 · S5
	**KA-F13 EX1**	Height extender for KPF-13	1 mm
	**KA-F13 EX3**	Height extender for KPF-13	3 mm

FEATURES

- **One piece**
  Fixed height with integrated joint spacer — quick to place.
- **Fine levelling**
  Stack 1 mm and 3 mm extenders to correct small level differences.
- **Open design**
  Ribbed ring structure lets water drain freely beneath the tiles.
- **Choice of joint width**
  2, 3, 4 or 5 mm spacer fins (S2–S5).

APPLICATIONS

Porcelain tiles · Natural stone · Balconies · Low-height terraces

TECHNICAL DRAWINGS

All dimensions in mm

KPF-13

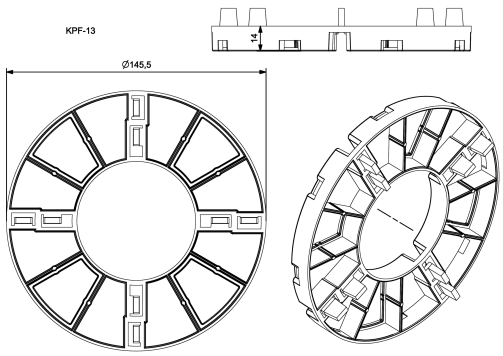

Ø145.5 · fixed height

KA-F13 · 1 mm



Ø145.7 × 1 mm

KA-F13 · 3 mm



Ø146.1 × 3 mm

KPF-13 + 1 mm



Assembled

KPF-13 + 3 mm



Assembled

MATERIAL & PERFORMANCE

Material	Polypropylene (PP), recycled content
Service temperature	−30 °C to +80 °C
Colour	Black
HS code	3925.90.80

RESISTANT TO

- UV & weathering
- Water, frost & moisture
- Rot & corrosion
- Algae & salt environments

SYSTEM DATA

Height	13 mm fixed (+1 / +3 mm)
Diameter	Ø145.5 mm
Joint options	S2 · S3 · S4 · S5
Extenders	KA-F13 EX1 · EX3

PACKAGING & LOGISTICS

Supplied in export cartons on stretch-wrapped pallets. Pieces per carton, pieces per pallet and container/truck quantities are confirmed with each quotation.

Samples, technical documentation and test reports are available on request.

SALES ENQUIRIES
sales@kuleflooring.com
www.kuleflooring.com

Kule Flooring reserves the right to change specifications without notice. Values are typical and should be verified for project-specific design.