03 · KPS SERIES — ADJUSTABLE MODULAR FLAT-TOP PEDESTALS

# KPS Series

Height-adjustable modular pedestal with flat top for interchangeable heads



KPS pedestals have a flat top that takes a range of interchangeable heads: joint spacers for tiles, carcass heads for joists, aluminium-profile holders and self-levelling sets. One stock of bases covers tile, decking and profile projects.

**21–202 mm**
Height range in 5 models

**Ø195 mm**
Base diameter

**13**
Interchangeable head accessories

**4,000+ kg**
Load, fully tightened*

## MODEL RANGE

| ITEM CODE | MIN. HEIGHT mm, closed | MAX. HEIGHT mm, extended | ADJUSTMENT mm | TOP |
|---|---|---|---|---|
| KPS-21-27 | 21 | 27 | 6 | Flat · accepts KPS heads |
| KPS-27-40 | 27 | 40 | 13 | Flat · accepts KPS heads |
| KPS-40-64 | 40 | 64 | 24 | Flat · accepts KPS heads |
| KPS-64-110 | 64 | 110 | 46 | Flat · accepts KPS heads |
| KPS-110-202 | 110 | 202 | 92 | Flat · accepts KPS heads |

## FEATURES

- **Modular head system**
  Fit SX/SHX joint spacers, carcass heads, profile holders or self-levelling sets.
- **One base, many uses**
  Reduce stock: the same base serves tile, decking and aluminium profile jobs.
- **Threaded height adjustment**
  Continuous adjustment from closed to fully extended height.
- **Slope correction**
  Self-levelling sets compensate falls up to 7°, KPS-C5 up to 5°.
- **Stable Ø195 mm base**
  Wide footprint spreads load on membranes and screeds.
- **Higher levels**
  Add one or more KA-EX-100 extenders (+100 mm each).

## APPLICATIONS

Porcelain tiles · Natural stone · Timber & WPC decking · Aluminium profiles · Roof terraces · Plazas



**KA-EX-100 EXTENDER**
+100 mm per extender; several can be combined. Compatible with KP & KPS.

## TECHNICAL DRAWINGS

All dimensions in mm · shown with SX joint spacer (13 mm fins)

### KPS-21–27 + SX

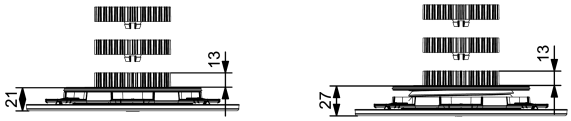


Closed · 21 mm | Extended · 27 mm

### KPS-27–40 + SX

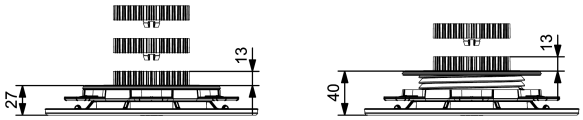


Closed · 27 mm | Extended · 40 mm

### KPS-40–64 + SX

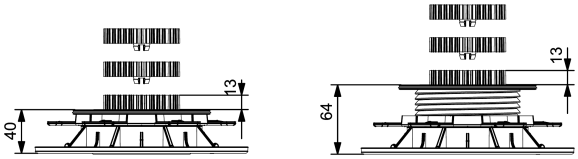


Closed · 40 mm | Extended · 64 mm

### KPS-64–110 + SX

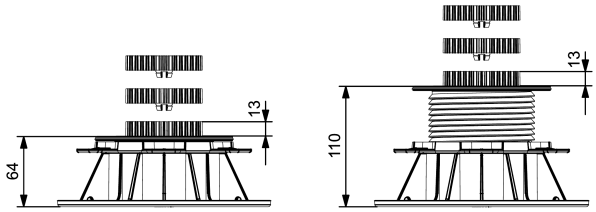


Closed · 64 mm | Extended · 110 mm

### KPS-110–202 + SX

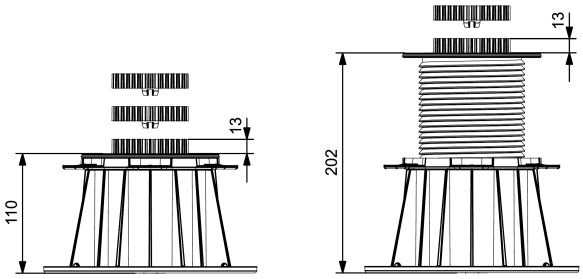


Closed · 110 mm | Extended · 202 mm

### KA-EX-100 extender

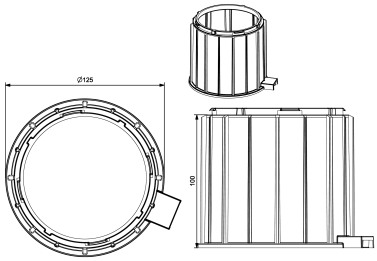


Ø125 × 100 mm

## MATERIAL & PERFORMANCE

| | |
|---|---|
| **Material** | Polypropylene (PP), recycled content |
| **Load capacity** | 900+ kg loose · 4,000+ kg fully tightened* |
| **Service temperature** | −30 °C to +80 °C |
| **Colour** | Black |
| **HS code** | 3925.90.80 |

### RESISTANT TO

- UV & weathering
- Water, frost & moisture
- Common construction chemicals
- Rot & corrosion
- Algae & salt environments

## SYSTEM DATA

| | |
|---|---|
| **Top** | Flat, for KPS heads |
| **Heads** | See KPS Accessories data sheet |
| **Base** | Ø195 mm, round |
| **Height adjustment** | Threaded body, continuous |
| **Extension** | KA-EX-100 (+100 mm), combinable |
| **Top pad** | KA-PDT-2 (2 mm) |
| **Slope pad** | KA-PCB-8 (8 mm, 2°) |

## PACKAGING & LOGISTICS

Supplied in export cartons on stretch-wrapped pallets. Pieces per carton, pieces per pallet and container/truck quantities are confirmed with each quotation.

Samples, technical documentation and test reports are available on request.

**SALES ENQUIRIES**
sales@kuleflooring.com
www.kuleflooring.com

* Load values from tests to TS 13776:2017-05; test reports available on request. Kule Flooring reserves the right to change specifications without notice. Values are typical and should be verified for project-specific design.